




Auto setups of all the following:








Our top-of-the-line air-feed creasing and perforating solution – fast, consistent and accurate.







Rotary Perforating Standard




RAC Compression Crease Assembly

The COUNT™ AccuCreaser Air provides fast, consistent quality creasing and perfing, with a variety of features that make it top of its class. Get super accurate rotary-actuated impact creasing with rotary perf/score capabilities, including micro-perf (up to four at a time), and automated distance recognition to support auto set-ups for a variety of creases, even perfect bind set-up. The AccuCreaser Air utilizes a bottom air paper feed with a built-in register guide to ensure accuracy with every sheet.



AccuCreaser Air



Count MADE IN USA

Features

- Provides modes for creasing, perforating or feeding.
- Bottom air feed with sheet spacing control.
- Rotary actuated impact creasing ensures maximum crease accuracy.
- Automated Distance Recognition allows auto setups for your most common creases and corresponding folds, including perfect bind.
- Perform up to 4 perfs at a time (including micro perf).
- Includes a sheet counter (for both batch and total sheet count).
- Add the optional inline transport to feed directly into the COUNT™
 CountCoat or other UV coaters.
- Includes standard and extra wide crease dies.
- User-friendly touch screen for easy set up and control of the machine.

Automatic Set-Up for Many Common Folds

Half

Tri-Fold

Z-Fold

Letter Fold

Roll Fold

Gate Fold

Double Gate Fold

Double Parallel Fold

Perfect Bind - No Hinge

Perfect Bind - Single Hinge

Perfect Bind - Double Hinge

Specifications

Model: AccuCreaser Air

Model No.: ACTREG

Paper Feed: Air

Weight: 300 lbs (136 kg)

Max Compression Crease:

(sheets per hour)

ston Crease. 5,50

Max Rotary Perf/Score Speed: 12,000

(sheets per hour)

Paper Weight Range: 60 - 350

(gsm)

Dimensions: 56.0 L x 30.0 W x 44.0 H in


(142.3 x 76.2 x 111.8 cm)

Max Sheet Size: 18 x 24 in (45.7 x 50.8 cm)

Min Sheet Size: 4.5 x 6 in (15.2 x 15.2 cm)

Electrical: 115 V, 60 Hz, 20 A or 230 V, 50 Hz, 20 A

Made in: U.S.A.

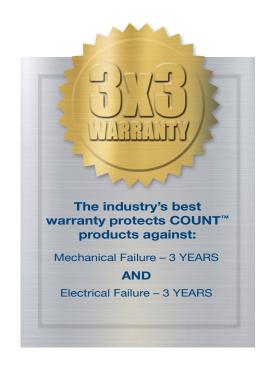



260-563-0621 | Fax: 260-563-4575 www.martinyale.com

